

FINNEGAN, HENDERSON, FARABOW, GARRETT & DUNNER, L.L.P.

1300 I STREET, N. W.

WASHINGTON, DC 20005-3315

MARCUS B. FINNEGAN  
1927-1979

66793 U.S. PTO

GLAS B. HENDERSON  
F. FARABOW, JR.  
HUR S. GARRETT  
ALD R. DUNNER  
BRUNSVOLD  
JENNINGS IV  
VOIGHT  
R. HEFTER  
PAYNE  
H. MINTZ  
O'ROURKE  
J. SANTORELLI  
C. ELMER  
H. SMITH  
STEPHEN L. PETERSON  
JOHN M. ROMARY  
BRUCE C. ZOTTER  
DENNIS P. O'REILLEY  
ALLEN M. SOKAL  
ROBERT D. BAJEFSKY  
RICHARD L. STROUP  
DAVID W. HILL  
THOMAS L. IRVING  
CHARLES E. LIPSEY  
THOMAS W. WINLAND  
BASIL J. LEWIS  
MARTIN I. FUCHS  
E. ROBERT YOCHE  
BARRY W. GRAHAM  
SUSAN HABERMAN GRIFFEN  
RICHARD B. RACINE  
THOMAS H. JENKINS  
ROBERT E. CONVERSE, JR.  
CLAIR X. MULLEN, JR.  
CHRISTOPHER P. FOLEY  
JOHN C. PAUL  
ROGER D. TAYLOR  
GRIFFITH B. PRICE, JR.  
JOHN F. HORNICK  
ROBERT D. LITOWITZ  
DAVID M. KELLY  
KENNETH J. MEYERS  
CAROL P. EINAUDI  
WALTER Y. BOYD, JR.  
STEVEN M. ANZALONE

DARREL C. KARL\*  
JEAN BURKE FORDIS  
BARBARA CLARKE MCCURDY  
JAMES K. HAMMOND  
RICHARD V. BURGJIAN  
J. MICHAEL JAKES  
JOHN C. LOWE  
DIRK D. THOMAS  
THOMAS W. BANKS  
CHRISTOPHER P. ISAAC  
BRYAN C. DINER  
M. PAUL BARKER  
ANDREW CHANHON SONU  
MARK S. SOMMERS  
KENNETH M. FRANKEL  
WILLIAM H. PRATT  
DAVID S. FORMAN  
VINCENT P. KOVALICK  
DON O. BURLEY  
GERSON S. PANITCH  
JAMES W. EDMONDSON  
MICHAEL R. MCGURK  
CHERI M. TAYLOR  
JOANN M. NETH  
LINDA A. WADLER  
LIAM O'GRADY\*  
CHARLES E. VAN HORN\*  
IAN C. BALLON\*  
JEFFREY A. BERKOWITZ  
MICHAEL R. KELLY  
JAMES B. MONROE  
DORIS JOHNSON HINES  
JEFFREY D. KARCESKI  
DAVID A. MANSPEIZER  
LORI-ANN JOHNSON  
R. BRUCE BOWER  
THOMAS H. MARTIN  
LISA F. PELLER  
THALIA V. WARNEMENT  
MICHELE C. BOSCH  
HOWARD W. LEVINE  
LESLIE I. BOOKOFF  
JOHN R. ALISON  
BARBARA R. RUDOLPH  
JEFF E. SCHWARTZ

202-408-4000  
FACSIMILE 202-408-4400

PALO ALTO, CALIFORNIA OFFICE

TELEPHONE 650-849-6600  
FACSIMILE 650-849-6666

ATLANTA, GEORGIA OFFICE

TELEPHONE 404-653-6400  
FACSIMILE 404-653-6444

BRUSSELS, BELGIUM OFFICE

TELEPHONE 011-322-646-0353  
FACSIMILE 011-322-646-2135

TOKYO, JAPAN OFFICE

TELEPHONE 011-813-3431-6943  
FACSIMILE 011-813-3431-6945

WRITER'S DIRECT DIAL NUMBER:

(202) 408-4003

April 22, 1998

ANTHONY M. GUTOWSKI  
STEPHEN G. KALINCHAK  
HOWARD A. KWON  
JULIA ANNE MATHESON  
SIMON D. ROBERTS  
L. SCOTT BURWELL  
ALLEN M. LO  
STEVEN MCCANN  
MICHAEL A. MORIN  
ROBERT L. BURNS  
DOUGLAS A. RETTEW  
ESTHER H. LIM  
MICHAEL T. SIEKMAN  
CHRISTIE BATY HEINZE  
WILLIAM F. RAUCHHOLZ  
DAVID L. CLARK\*  
FRANK A. DECOSTA III  
MARCIA R. MORTON\*  
B. BRETT HEAVNER  
SIMONE L. LONGAN\*  
MICHAEL J. FLIBBERT  
RICHARD L. RAINEY  
STEVEN P. O'CONNOR  
SCOTT A. HERBST  
YORK M. FAULKNER  
JACQUELINE M. RYALL  
YITAI HU  
MONICA B. RICHMAN  
ALAN A. WRIGHT  
MICHAEL V. KRULJAC  
BRIAN P. KINNENAR\*  
PAOLO M. TREVISAN\*  
SCOTT H. BLACKMAN  
ANDREW C. WARNECKE\*  
BARRY D. BIDDLE  
ANTHONY A. DREUX\*  
MATTHEW DELGIORNO  
LIONEL M. LAVENUE  
CAROL R. WILLIAMS\*  
SUSAN M. MUCHMORE  
W. CHARLES SAUNDERS\*  
COURTNEY H. BAILEY  
JOHN M. ALBRIGHT\*  
JENNIFER M. COLAIANNI\*  
KEITH M. KUPFERSCHMID\*

KARLTON C. BUTTS\*  
MARK J. PIN\*  
LANCE L. VIETZKE  
KRISTIN L. YOHANNAN  
CHUN Y. YANG\*  
MICHAEL L. KIKLIS\*  
ANDREW S. BRENNER\*  
HOUTAN K. ESFAHANI  
ELIZABETH A. HURLEY\*  
KATHLEEN A. DALEY  
KURT A. LUTHER\*  
MONICA A. RIVA\*  
JEANNE M. TANNER\*  
CHERYL A. LILJESTRAND\*  
KULPREET S. RANA\*  
EYAL H. BARASH\*  
STEVEN J. SCOTT\*  
ERIK R. PUKNYS\*  
JOHN J. YIM\*  
LELAND Z. WIESNER\*  
JA K. MOON\*  
REBECCA M. MCNEILL\*  
KIMANI P. CLARK\*  
LYNNE E. PETTIGREW\*  
GEOFFREY C. MASON\*

COUNSEL

ARTHUR J. LEVINE  
GEORGE E. HUTCHINSON  
WILLIAM T. MCCLAIN  
ROBERT F. ZIEMS  
ROBERT J. EICHELBERG  
ERNEST F. CHAPMAN  
WAYNE W. HERRINGTON  
ROBERT A. CAHILL  
C. EDWARD GOOD\*  
LESLIE A. McDONELL  
ALLEN R. JENSEN  
JAMES J. BROWN  
KRISTEN K. DARNELL\*  
JEFFREY B. CHASNOW\*  
CHARLES S. HALL

PATENT AGENT  
FRANK E. CAFFOE

\*ADMITTED TO A BAR OTHER THAN DC

ATTORNEY DOCKET NO. 07259-0001

Box PATENT APPLICATION  
Assistant Commissioner for Patents  
Washington, D.C. 20231

Re: New U.S. Patent Application  
Title: FRANGIBLE METAL ARTICLES, FRANGIBLE  
BULLETS AND AMMUNITION AND METHOD  
OF MAKING SUCH ARTICLES  
Inventors: Joseph C. BENINI, Timothy G. SMITH,  
and Roger J. SMITH

Sir:

We enclose the following papers for filing in the United States Patent and Trademark Office in connection with the above patent application.

1. Application - 25 pages, including 7 independent claims and 27 claims total.

Assistant Commissioner for Patents  
April 22, 1998  
Page 2

ATTORNEY DOCKET NO. 07259.0001

2. Drawings - 1 sheet of informal drawings.
3. Declaration and Power of Attorney.
4. A check for \$1,272.00 representing a \$790.00 filing fee, \$154.00 for seven (7) additional claims, and \$328.00 for four (4) additional independent claims.

Please accord this application a serial number and filing date.

The Commissioner is hereby authorized to charge any additional filing fees due and any other fees due under 37 C.F.R. § 1.16 or § 1.17 during the pendency of this application to our Deposit Account No. 06-0916.

Respectfully submitted,

FINNEGAN, HENDERSON, FARABOW,  
GARRETT & DUNNER, L.L.P.

By: Stephen L. Peterson  
Stephen L. Peterson  
Reg. No. 26,326

SLP/ams  
Enclosures

**UNITED STATES PATENT APPLICATION**  
**OF**  
**JOSEPH C. BENINI**  
**TIMOTHY G. SMITH**  
**AND**  
**ROGER J. SMITH**  
**FOR**  
**FRANGIBLE METAL ARTICLES,**  
**FRANGIBLE BULLETS AND AMMUNITION**  
**AND METHOD OF MAKING SUCH ARTICLES**

LAW OFFICES

FINNEGAN, HENDERSON,  
FARABOW, GARRETT  
& DUNNER, L.L.P.  
1300 I STREET, N.W.  
WASHINGTON, D. C. 20005  
202-408-4000

## **BACKGROUND OF THE INVENTION**

5 The present invention relates to frangible metal articles, and, in particular, to frangible bullets having particular use in target and/or training applications. Indoor and outdoor shooting applications benefit from the absence of lead as well as the frangibility (break-up) characteristics. Frangible bullets for such uses are well known. They are characterized by the use of metal powder consolidated into a bullet that has sufficient strength to maintain its integrity during firing while fragmenting on impact with a solid object having sufficient mass and rigidity to fracture the bullet.

10 Conventional, full-density, cast, swaged, copper plated or copper jacketed lead bullets are also used in indoor firing ranges and for training. In order to protect the shooters from ricochets, a "bullet trap" is normally required to stop the projectile and any resulting fragments from injuring shooters. Furthermore, the walls of the firing range or training facility may be covered with rubber or some other projectile absorbing material to stop occasional ricocheting bullet fragments. Thus, the cost of constructing and maintaining indoor target/training ranges is substantial. Moreover, even using bullet traps and ricochet absorbing materials on the walls, occasionally a ricochet will somehow defeat such systems and injure a shooter.

20 Shooting lead bullets causes the emission of airborne lead dust that is introduced into the atmosphere. This requires the implementation of elaborate

ventilation systems and may require individuals working in such facilities to undergo blood monitoring programs to determine the amount of lead in their bloodstream. The accumulation of spent lead bullets and bullet fragments must be properly disposed of and regulations concerning the disposal of lead waste are becoming increasingly complex. Thus, the generation of lead dust and the accumulation of spent lead bullets and fragments causes environmental concerns and poses the potential for serious health problems.

There has been a long-standing search for a material to use as a bullet that does not contain lead. One problem in replacing lead in ammunition is that the replacement material must be sufficiently heavy such that ammunition using such bullets, when used in automatic or semi-automatic weapons, will be able to cycle the weapon properly.

The main criteria for the ability of a round to cycle automatic or semi-automatic weapons is the amount of energy that the ammunition delivers to the cycling mechanism. For some types of weapons, this energy is delivered by the expanding gases pushing back the cartridge case. For some others, the recoil is used and for still others high-pressure gases are connected, through a port inside the barrel, to a mechanism that cycles the firearm.

All firearms, are designed to function with bullets and propellants (gunpowder) that produce certain pressure-vs-time characteristics. Using a lighter bullet may cause problems in operation of a semi-automatic or automatic weapon if there is too low an energy transfer to give the mechanism the needed energy to

cycle. While the energy can be increased by the use of additional propellant or different types of propellants, this is not desirable because the characteristics of such a training round would be significantly different from the ammunition having conventional bullets and propellants.

5           In addition, in order to replace lead in a bullet, the selected material should have a large enough specific gravity so that the resulting bullet mass is compatible with commercially available propellants. It is not economically feasible to develop a lead-free round where a special propellant or other component would need to be developed.

10           Further, a lead-free, training round should break up into small particles when it hits a hard surface. The individual particles are then too light to carry enough energy to be dangerous. On the other hand, such bullets should be sufficiently strong to withstand the high accelerations that occur on firing, ductile enough to engage the barrel rifling and durable enough to retain the identifying engraving  
15           from the rifling as required by government agencies.

          Practice and training rounds employing combinations of resinous binders and metallic powders have generally not proven satisfactory because of uncontrollable frangibility characteristics, insufficient strength, increased fouling of the barrel of the weapon, decreased barrel longevity and inability to retain or receive engraving from  
20           the rifling of the barrel through which it is fired.

## SUMMARY OF THE INVENTION

Accordingly, the present invention is directed to a metal article, and, in particular, a frangible metal bullet, and a method of making same, which substantially obviates one or more of the limitations and disadvantages of the prior art.

Additional features and advantages of the invention will be set forth in the description which follows, and in part will be apparent from the description, or may be learned by practice of the invention. The objectives and other advantages of the invention will be realized and attained by the article and method particularly pointed out in the written description and claims thereof as well as the appended drawings.

To achieve these and other advantages and in accordance with the purpose of the invention, as embodied and broadly described, the present invention is directed to a metal article and a method for making the article. The article comprises a plurality of metal particles and a brittle binder. Preferably the brittle binder consists essentially of at least one intermetallic compound formed from the metal particle and a binder material. The binder material is a metal or metalloid that forms a transient liquid phase at a treatment temperature below the temperature of joining of the metal particles, below the temperature of formation of substantial amounts of a ductile alloy of the metal of the metal particles and the binder material and above the temperature at which the binder material and the metal particles form at least one intermetallic compound that joins the metal particles into a coherent, frangible article. According to the method of making the article, the metal particles

5

10

15

20

LAW OFFICES

FINNEGAN, HENDERSON,  
FARABOW, GARRETT  
& DUNNER, L.L.P.  
1300 I STREET, N. W.  
WASHINGTON, D. C. 20005  
202-408-4000

and powdered binder material are compacted to the shape of the metal article, then heated to the treatment temperature for a time sufficient to form a transient liquid phase and at least one intermetallic compound, and then cooled to form the metal article.

5                   According to one embodiment of the invention, the metal article is a frangible metal bullet. In further aspects of the invention, the metal particles are metals or metal-base alloys selected from copper, iron, nickel, gold, silver, lead, chromium and their alloys; and preferably copper or copper-based alloys, and the binder material consists essentially of materials selected from tin, zinc, gallium, germanium, silicon, arsenic, aluminum, indium, antimony, lead, bismuth, and their alloys and preferably tin or tin-based alloys.

10                   Another embodiment is a frangible metal bullet comprised of a plurality of unsintered metal particles and at least one intermetallic compound binder joining the metal particles to form the metal bullet.

15                   In further aspects of this embodiment, the binder has a microstructure of a porous, brittle material and the final treated product using such a binder has a transverse rupture strength of less than 13,000 psi. Frangible bullets having such properties are fractured into a plurality of particles by brittle failure of the binder, such that the fracture absorbs the majority of the kinetic energy of the bullet.

20                   In still a further embodiment, the invention is a method of making a metal article, such as a frangible, metal bullet, comprising the steps of: forming a mixture comprising metal particles, for example, copper and copper alloys and a metal



binder material, the metal binder material comprising metals and alloys. disposed to form intermetallic compounds with the metal of the metal particles, for example, tin and tin alloys. The mixture composition is disposed to form a transient liquid phase at a treatment temperature below the temperature of joining of the metal particles, below the temperature of formation of substantial amounts of a ductile alloy of the metal of the metal particles and the metal binder material but above the temperature needed to form at least one intermetallic compound of the metal and the metal binder material. The mixture is compacted to form a shaped green compact, heated to the treatment temperature for a time sufficient to form an effective amount of a transient liquid phase of the metal binder and at least one intermetallic compound, thereby forming a shaped metal precursor; and returning the shaped metal precursor to room temperature to form the metal article.

In one aspect of this embodiment, the dimensions of the shaped green compact are within 0.2% of the dimensions of the frangible metal article.

In further embodiments of the method of the invention, is the green compact is heated to a temperature in the range of from 230 to 700°C for up to sixty minutes, and the dimensions of the green compact are within 0.2% of the dimensions of the frangible metal bullet.

It is to be understood that both the foregoing general description and the following detailed description are exemplary and explanatory and are intended to provide further explanation of the invention as claimed.

## **BRIEF DESCRIPTION OF THE DRAWINGS**

The accompanying drawings are included to provide a further understanding of the invention and are incorporated in and constitute a part of this specification, and together with the description serve to explain the principles of the invention.

5           Figure 1 is a cross-sectional view of a center-fire cartridge that includes a bullet of the invention.

Figure 2 is a side view of a discharged bullet of the invention, illustrating retention of the engraving from the barrel rifling.

## **DESCRIPTION OF THE PREFERRED EMBODIMENTS**

Reference will now be made to preferred embodiments of the invention.

10           In accordance with the present invention, a metal article is provided which comprises a plurality of metal particles joined together by a binder. The binder material is disposed to form a transient liquid phase at a treatment temperature below the temperature of joining of the metal particles through sintering, below the temperature of formation of a significant amount of a ductile alloy of the binder material and the metal particles but above the temperature of formation of at least one intermetallic compound of the metal of the metal particles and the binder material. For purposes of this invention a significant amount of such a ductile alloy is an amount that renders the resulting structure ductile to the point where the final  
15           treated article is no longer frangible. For example, in an embodiment where the metal particles are copper and the binder is tin, a treatment temperature of 230 to  
20           430°C produces a transient liquid phase, initially just of liquid tin, without any

5 appreciable copper particle/copper particle bonding. The liquid tin subsequently receives copper and forms a first intermetallic compound in solid form on the surface of the copper particles. Diffusion of copper into and through the initial intermetallic compound forms additional intermetallic compounds and, depending on the temperature and time the entire amount of liquid tin may be transformed into a solid comprised of at least one intermetallic compound of copper and tin. If the article is cooled before such transformations are complete a portion of the tin may solidify in the form of a metal but the intermetallic compound or compounds on the surface of the copper particles. The amount of intermetallic compound or compounds in relation to the amount of solid tin will determine if the article is frangible or ductile. In addition, the time and temperature of treatment should be such that there is no appreciable formation of an alpha bronze phase in the microstructure. If there were appreciable amounts of alpha bronze phase, it would dramatically reduce the frangibility of the article by significantly increasing the ductility and the transverse rupture strength of the treated article.

20 The metal particles and the binder material are compacted together into the shape of the metal article and then heated to the treatment temperature for a time sufficient to form an effective amount of the transient liquid phase of the binder and then cooled to form the metal article. An effective amount of the transient liquid phase of the binder is that amount sufficient to adhere the metal particles into a coherent body when the transient liquid phase of the binder forms at least one intermetallic compound. Such an amount does not preclude there from being minor

amounts of metal particle/metal particle bonding but the mechanical properties of the metal article are determined more by the mechanical properties of the binder than the strength of any metal particle/metal particle bonding in the metal article

In a preferred embodiment of the invention, the metal article is a frangible, lead-free, metal bullet. The metal particles are unsintered and the metal binder is a brittle intermetallic compound. For purposes of the present invention the term "brittle" includes materials that, at ambient temperatures, exhibit low fracture toughness, low ductility or low resistance to crack propagation.

Another preferred embodiment of the invention, is a frangible, lead-free, metal bullet loaded in a cartridge. As embodied in Fig. 1, a conventional centerfire cartridge is depicted using the bullet of the present invention, however, the invention can also be used in rimfire cartridges (not shown). The bullet 10, here a round-nose 9mm bullet, is inserted in the case mouth 12. The case 14 can be crimped (deformed inwardly) at the case mouth 12 to assist in retaining the bullet at the desired depth of insertion into the case 14. The bullets of the present invention have sufficient strength and ductility to withstand the crimping operation without fracturing during crimping. The case further includes a primer pocket 16 into which a separate primer 18 can be inserted. The case depicted in Fig. 1 is a straight-walled case typical of pistol ammunition. Bullets of the present invention are also useful as rifle ammunition and for such ammunition the case may be a "bottle necked" cartridge (not shown) with the case mouth having a diameter less than the body of the cartridge case. The propellant (gunpowder) 20 is placed in the body of

the cartridge case 14. It is preferred that the primer 18 be lead-free. Thus, if the bullet 10 is also lead-free the firing of such a cartridge generates no lead. Such primers are manufactured by CCI Industries of Lewiston, Idaho, U.S.A. and are designated as Cleanfire® primers. As here embodied the primer 18 includes a lead-free primer composition 22, however, a rimfire cartridge would have such a composition inside the rim of the cartridge itself (not shown).

Preferably, the metal particles of the invention consist essentially of metals or metal base alloys selected from copper, iron, nickel, gold, silver, lead, chromium, and their alloys, preferably copper, iron, nickel, and chromium and most preferably copper and copper alloys. In a further preferred embodiment of the invention, the binder material consists essentially of metal, metals, metal-based alloys, metalloids and mixtures and alloys thereof that will form at least one intermetallic compound with the metal of the metal particles. Such materials may be selected from tin, zinc, gallium, germanium, silicon, arsenic, aluminum, indium, antimony, lead, bismuth, and their mixtures and alloys, most preferably tin and tin alloys

It is an important feature of the present invention that the frangible metal bullet, while maintaining its integrity during firing is rendered into a plurality of particles by brittle failure of the brittle binder upon impact of the bullet with an object. thereby avoiding problems of ricocheting encountered when using conventional cast or swaged ammunition. This fracturing of the frangible metal bullet into a plurality of particles further absorbs the majority of the kinetic energy of the bullet thereby essentially eliminating the possibility of the bullet, or pieces of the bullet, ricocheting.

Because of the porous microstructure of the metal article of the invention, it is also able to retain various lubricants, such as molybdenum disulfide, teflon®, and carbon, to facilitate its passage through the barrel of the weapon.

5 The microstructure of such materials after appropriate thermal treatments for the particular metal particle/binder combination is characterized by solid metal particles adhered one to the other by binder material that consists essentially of at least one intermetallic compound. Such systems are preferred because they render the appropriately heat treated material frangible. The binder may be fully dense or porous.

10 In addition to the mechanical properties described above, the frangible metal bullet of the invention possess sufficient strength due to the binder employed, to withstand automatic or manual loading of the bullet into a cartridge, maintain its integrity during firing and to receive and retain the engraving from the rifling of the barrel of the weapon from which it is fired as shown in Figure 2. Fig. 2 depicts a  
15 schematic view of a 9mm pistol bullet 30 with grooves 32 on its outer peripheral surface. These grooves 32 are formed by the rifling in the gun barrel as the bullet passes through the barrel and are normally characteristic of the particular barrel that fired the bullet. This latter feature is a particular consideration in law enforcement where it is considered essential that it be possible to identify particular weapons  
20 from which bullets have been discharged.

In accordance with the present invention, the metal articles are formed by a method comprising forming a mixture of the metal particles and binder materials to

form a transient liquid phase at a treatment temperature below the temperature of sintering neck growth of the metal particles and above the temperature at which at least one intermetallic compound of the metal of the metal particles and the binder materials are formed. The mixture is then compacted, under pressure using known compacting techniques, such as die compaction, rotary screw compaction, isostatic pressing, to form a shaped green compact. The green compact is heated to the treatment temperature for a time sufficient to form an effective amount of the transient liquid phase and then at least one intermetallic compound thereby forming a shaped metal precursor. The shaped metal precursor is then returned to room temperature to form the metal article of the invention which can be a frangible, lead-free metal bullet. The treatment temperature and duration of heating will, of course, depend on the selection of metal particles and binder material. The treatment temperature will be below the temperature at which the metal particles join to one another by sintering, below the temperature of formation of substantial amounts of a ductile alloy of the metal of the metal particles and the binder material and above the temperature at which at least one intermetallic compound of the metal of the metal particles and the binder material is formed. This has the beneficial effect of there being very little dimensional change taking place as the result of the thermal treatment of the green compact.

In a preferred embodiment of the invention the metal particles consist essentially of copper and the binder material consists essentially of tin and the green compact is heated to a temperature in the range of ~~150~~ to 430°C for up to

230°C  
OK JCB 4-21-98  
CK KJS 4-21-98  
OK 132 4-21-98

sixty minutes to form a brittle binder consisting essentially of at least one intermetallic compound.

As noted above, a particular advantageous aspect of the present invention is that the frangible metal article retains essentially the shape and dimensions of the shaped green compact. Thus, the shape and dimensions of the tooling that forms the shaped green compact can be the same as the desired final product. In accordance with the invention, the dimensions of the frangible metal article are within 0.2% of the dimensions of the shaped green compact.

The following examples are illustrative of the invention.

#### **EXAMPLE 1**

A number of frangible metal bullets were formed in accordance with the invention using a commercial bronze premix (PMB-8, OMG Americas, Research Triangle Park, North Carolina, U.S.A.) The components of the premix were 89.75 weight percent copper particles, 10 weight percent tin particles and .25 weight percent zinc stearate lubricant. The lubricant was present to aid in compaction and ejection of the green compact and was substantially removed during subsequent heat treatment. The premix had particle sizes of about 8% greater than 250 mesh, about 30% greater than 325 mesh, with the balance less than 325 mesh.

The mixture was compacted using a standard straight-walled die in a mechanical press that was later determined to exert a gross load of approximately 20 tons. The die formed the mixture into a number of green compacts of the size and configuration of a 9mm bullet. The green compacts were then heated at a



temperature of 260°C for 30 minutes in a nitrogen atmosphere, at which time the total weight of the binder had been transformed into a transient liquid binder phase and ultimately into at least one intermetallic compound of copper and tin. The treated compacts were then cooled to room temperature, resulting in a 9mm bullets weighing 105 grains (6.80 grams) deviating less than 0.1% from the original dimensions of the green compact.

The bullets were loaded into a brass cartridges with 4.5 grains of Hercules Bullseye® powder and were crimped. The resulting ammunition was test fired from several different weapons (including semi-automatic and full automatic weapons) against a 0.25 inch steel barrier. The ammunition operated without malfunction, feeding, firing and ejecting without problems. Upon impact with the barrier the bullets completely disintegrated into fine powder.

#### **EXAMPLES 2 - 4**

The same material formed into bullets in Example 1 was formed into standard transverse rupture strength test bars. The samples were tested in the green condition (compacted but without a heat treatment) (Example 2), after the same heat treatment of Example 1, a temperature of 260°C for 30 minutes in a nitrogen atmosphere (Example 3) and after a heat treatment at a temperature of 810°C for 30 minutes in a nitrogen atmosphere (Example 4). The following properties were determined - the density, the percentage dimensional change from the die size (as describe in ASTM B610, MPIF 44, or ISO 4492), the Rockwell H hardness (HRH) and the transverse rupture strength (TRS) in units of pounds pers

square inch (psi) as determined according to ASTM B528, MPIF 41, or ISO 3325).

The Rockwell H hardness scale is based on the use of a 1/8 inch ball indenter and a load of 150Kg (ASM Metals Handbook).

| <u>Example</u> | <u>Density</u> | <u>Size change</u> | <u>HRH(ave.)</u> | <u>TRS</u> |
|----------------|----------------|--------------------|------------------|------------|
| 2              | 7.26g/cc       | 0.14%              | 73.7             | 3,651 psi  |
| 3              | 7.27g/cc       | 0.07%              | 94.8             | 12,710 psi |
| 4              | 6.53 g/cc      | 2.53%              | 52.7             | 32,625 psi |

The above data indicates that the embodiment using an approximate 90/10 copper/tin mixture, conventionally compacted and then heat treated at a temperature of 260°C for 30 minutes, produces a bullet of acceptable frangibility when the transverse rupture strength of the treated article is approximately 13,000 psi or less. Transverse rupture strengths greater than 13,000 psi are operable for frangible bullets but are not preferred.

Metallography on other samples confirmed that, in the copper/tin system, the tin initially melted and the liquid tin infiltrated the spaces around the copper particles. Copper then diffused into the liquid tin and formed at least a first intermetallic compound that solidified as a layer on the copper particles. Liquid tin may still be present and it is believed that the first intermetallic compound may melt as more copper and tin diffuse into the first intermetallic compound to form a second intermetallic compound. At the treatment temperature tin continues to diffuse toward the copper particles forming voids in the binder. Depending on the amount of tin in the mixture, the treatment temperature and the time at the treatment

temperature elemental tin will disappear and at least one intermetallic compound will be formed. Such intermetallic compounds have little ductility, low fracture toughness and a low resistance to crack propagation. Because such materials comprise the binder joining the metal particles and the metal particles are not otherwise bound by a ductile material (either through particle/particle bonding or bonding with a ductile binder) the joined article is frangible. Moreover, the volume changes associated with the creation of intermetallic compounds and porosity can be manipulated to form articles that do not significantly change dimensionally during the formation of the bonded article.

The copper/tin phase diagram indicates that at equilibrium a number of different intermetallic compounds can be formed. While not limiting the invention to the embodiment disclosed and not wishing to be bound by theory, it is believed that the intermetallic compound present in the preferred embodiment is what is known on an equilibrium phase diagram as the eta phase. The thermal treatments described herein may or may not result in equilibrium structures but the species of the intermetallic compound or intermetallic compounds or the existence of non-equilibrium phases is not as significant to the invention as are the effects such materials, when used as binders, have on the mechanical properties and dimensions of the articles formed therefrom. Thus, the binders of the invention can be mixtures of intermetallic compounds, a single intermetallic compound or a brittle mixture of some phase with an intermetallic compound.

Additional advantages and modifications of the disclosed embodiments may occur to those skilled in the art. Specific intermetallic compounds or combinations thereof may be later found to be advantageous. Such materials are within the scope of the present invention. The invention, in its broader aspects, is therefore not limited to the specific materials, details, embodiments and examples shown and described. Accordingly, departures may be made from such that specifically disclosed without departing from the scope of the invention as defined by the appended claims and their equivalents.

5

10  
15  
20  
25  
30  
35  
40  
45  
50  
55  
60  
65  
70  
75  
80  
85  
90  
95  
100

**WHAT IS CLAIMED IS:**

1. A metal article comprising:  
a plurality of metal particles;  
a metal or metalloid binder material disposed to form a transient liquid phase  
at a treatment temperature below the temperature of joining of said metal particles,  
below the temperature of formation of substantial amounts of a ductile alloy of said  
metal of said metal particles and said binder material and above the temperature  
of formation of at least one intermetallic compound of said metal of said metal  
particles and said binder material, said metal particles and said binder material  
being compacted to the shape of said metal article, then heated to said treatment  
temperature for a time sufficient to form said transient liquid phase and at least one  
intermetallic compound, and then cooled to form said metal article.
2. A frangible metal article comprising:  
a plurality of metal particles;  
a brittle binder for joining said metal particles, said binder consisting  
essentially of at least one intermetallic compound.
3. The frangible metal article of claim 2 wherein said metal particles and a metal  
or metalloid binder material are compacted to the shape of a bullet, then heated to  
said treatment temperature for a time sufficient to form an effective amount of said  
transient liquid phase and at least one intermetallic compound, and then cooled to  
form said frangible metal bullet.

4. The frangible metal article of claim 2 wherein said metal particles consist essentially of metals or metal-base alloys selected from the group consisting of copper, iron, nickel, gold, silver, lead, chromium and their alloys.

5. The frangible metal article of claim 2 wherein said metal or metalloid binder material consists essentially of a material selected from the group consisting of: tin, zinc, gallium, germanium, silicon, arsenic, aluminum, indium, antimony, lead, bismuth, their mixtures and their alloys.

6. The frangible metal article of claim 2 wherein said binder consists essentially of at least one intermetallic compound of a first metal selected from the group consisting of copper, iron, nickel, gold, silver, lead, chromium and a second metal or metalloid selected from the group consisting of: tin, zinc, gallium, germanium, silicon, arsenic, aluminum, indium, antimony, lead, bismuth.

7. A frangible, lead-free, metal bullet comprising:

a plurality of metal particles, said metal being selected from the group consisting of: copper, iron, nickel and chromium;

a metal or metalloid binder material disposed to form a transient liquid phase and a brittle metal binder comprised of at least one intermetallic compound at a treatment temperature below the temperature of metal particle to metal particle bonding or the formation of significant quantities of a binder/metal particle alloy.

8. The frangible metal bullet claim 7 wherein said metal particles and said binder material are compacted to the shape of said bullet, then heated to said

treatment temperature for a time sufficient to form said transient liquid phase, at least one intermetallic compound and then cooled to form said metal bullet.

9. The frangible metal bullet of claim 7 wherein said metal particles consist essentially of copper or copper-base alloys.

10. The frangible metal bullet of claim 9 wherein said binder consists essentially of tin or tin-based alloys.

11. The frangible metal bullet of claim 9 wherein said binder material consists essentially of tin and said brittle binder comprises an intermetallic compound of copper and tin.

12. The frangible metal bullet of claim 11 wherein said intermetallic compound of copper and tin consists essentially of the eta phase.

13. A frangible metal bullet comprising:  
a plurality of unsintered metal particles;  
an intermetallic compound binder joining said metal particles to form said metal bullet.

14. The frangible metal bullet of claim 13 wherein said binder has a microstructure characterized as a porous, brittle, re-solidified transient liquid phase that has formed at least one intermetallic compound and bonded to the adjoining metal particles.

15. The frangible metal bullet of claim 13 wherein said metal bullet consists of a material having a transverse rupture strength of less than 13,000 psi.

16. The frangible metal bullet of claim 13 wherein said frangible metal bullet is rendered into a plurality of particles by brittle failure of said binder.

17. The frangible metal bullet of claim 16 wherein the fracture of said frangible metal bullet into a plurality of particles absorbs the majority of the kinetic energy of said bullet.

18. A method of making a metal article, said method comprising the steps of:  
forming a mixture comprising metal particles and a metal or metalloid binder material, said metal binder material being disposed to form a transient liquid phase and at least one intermetallic compound at a treatment temperature below the temperature of joining of said metal particles and below the temperature of formation of substantial amounts of a ductile alloy of said metal particles and said binder;

compacting said mixture to form a shaped green compact;

heating said shaped green compact to said treatment temperature for a time sufficient to form an effective amount of a transient liquid phase of said binder and at least one intermetallic compound, thereby forming a shaped metal precursor; and

returning said shaped metal precursor to room temperature to form said metal article.

19. The method of making a frangible metal article set out in claim 18, wherein the dimensions of said shaped green compact are within 0.2 % of the dimensions of said frangible metal article.



20. A method of making a frangible metal bullet, said method comprising the steps of:

forming a mixture comprising metal particles and a metal or metalloid binder material disposed to form a transient liquid phase and at least one intermetallic compound at a treatment temperature below the temperature for joining said metal particles and formation of substantial amounts of a ductile alloy of said metal particles and said binder material;

compacting said mixture to form a green compact in the shape of said bullet;

heating said green compact to said treatment temperature for a time sufficient to form an effective amount of a transient liquid phase of said binder material and at least one intermetallic compound, thereby forming a shaped metal precursor; and

returning said metal precursor to room temperature to form said frangible metal bullet.

21. The method of making a frangible metal bullet as set out in claim 20, wherein said metal particles consist essentially of copper, and said binder material consists essentially of tin and said green compact is heated to a temperature in the range of from 230 to 700°C for up to sixty minutes.

22. The method of claim 21, wherein said green compact is heated to a temperature in the range of from 230 to 430°C for up to sixty minutes.

23. The method of making a frangible metal bullet as set out in claim 20, wherein the dimensions of said green compact are within 0.2% of the dimensions of said frangible metal bullet.

24. A lead-free cartridge comprising:

a cartridge case having a neck;

a lead-free primer composition;

propellant within said case; and

5 a frangible, lead-free, metal bullet comprised of a plurality of unsintered metal particles joined with a brittle binder consisting essentially of at least one intermetallic compound, said metal particles comprising a metal selected from the group consisting of copper, iron, nickel, chromium, tungsten and their alloys, said bullet being in said case neck.


25. The cartridge of claim 24 wherein said binder material comprises a material selected from the group consisting of: tin, zinc, gallium, germanium, silicon, arsenic, indium, aluminum, antimony, bismuth and their mixtures.

26. The cartridge of claim 24 wherein said cartridge is a centerfire cartridge having a primer pocket with a primer therein.


27. The cartridge of claim 24 wherein said cartridge is a rimfire cartridge.

## ABSTRACT OF THE DISCLOSURE

5 A frangible metal article such as a bullet and a method for making it. The  
frangible metal article is formed from a mixture of metal particles and metal or  
metalloid binder material which is compacted into the desired shape, heated to a  
temperature above that needed to form a transient liquid phase and at least one  
intermetallic compound but below the temperature of joining of the metal particles  
by sintering and below the temperature of formation of substantial amounts of a  
ductile alloy of the metal of the particles and the metal or metalloid binder material  
and then cooled. When such articles are formed into bullets they have sufficient  
10 strength to maintain their integrity during firing but disintegrate into powder on  
impact and can be formulated to be lead-free.

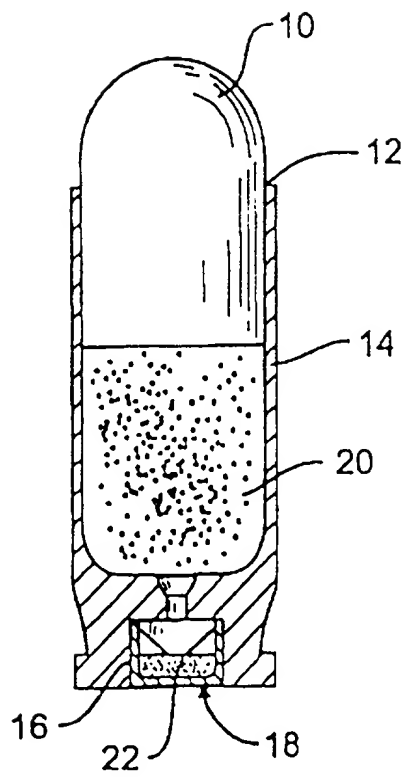

**FIG. 1**

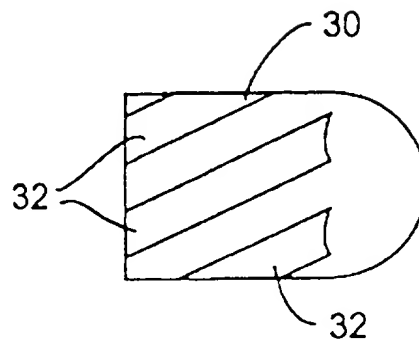

**FIG. 2**

**DECLARATION AND POWER OF ATTORNEY**

As a below named inventor, I hereby declare that my residence, post office address and citizenship are as stated below next to my name, I believe I am the original, first, and sole inventor (if only one name is listed below) or an original, first, and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled: FRANGIBLE METAL ARTICLES, FRANGIBLE BULLETS AND AMMUNITION AND METHOD OF MAKING SUCH ARTICLES

the specification of which ☒ is attached and/or ☐ was filed on \_\_\_\_\_ as United States Application Serial No \_\_\_\_\_ or PCT International Application No \_\_\_\_\_ and was amended on \_\_\_\_\_ (if applicable)

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above. I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR § 1.56

I hereby claim foreign priority benefits under 35 U.S.C. § 119(a)-(d) or § 365(b) of any foreign application(s) for patent or inventor's certificate or § 365(a) of any PCT international application(s) designating at least one country other than the United States, listed below and have also identified below, any foreign application(s) for patent or inventor's certificate, or any PCT International application(s) having a filing date before that of the application(s) of which priority is claimed

| Country | Application Number | Date of Filing | Priority Claimed Under 35 U.S.C. 119                     |
|---------|--------------------|----------------|--|
|         |                    |                | <input type="checkbox"/> YES <input type="checkbox"/> NO |
|         |                    |                | <input type="checkbox"/> YES <input type="checkbox"/> NO |

I hereby claim the benefit under 35 U.S.C. § 119(e) of any United States provisional application(s) listed below

| Application Number | Date of Filing |
|--------------------|----------------|
|                    |                |
|                    |                |

I hereby claim the benefit under 35 U.S.C. § 120 of any United States application(s) or § 365(c) of any PCT International application(s) designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application(s) in the manner provided by the first paragraph of 35 U.S.C. § 112, I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR § 1.56 which became available between the filing date of the prior application(s) and the national or PCT International filing date of this application



| Application Number | Date of Filing | Status (Patented, Pending, Abandoned) |
|--------------------|----------------|---------------------------------------|
|                    |                |                                       |
|                    |                |                                       |

I hereby appoint the following attorney and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith: **FINNEGAN, HENDERSON, FARABOW, GARRETT & DUNNER, L.L.P.**, Douglas B. Henderson, Reg. No. 20,291, Ford F. Farabow, Jr., Reg. No. 20,630, Arthur S. Garrett, Reg. No. 20,338, Donald R. Dunner, Reg. No. 19,073, Brian G. Brunsvold, Reg. No. 22,593, Tipton D. Jennings, IV, Reg. No. 20,645, Jerry D. Voight, Reg. No. 23,020, Laurence R. Hefter, Reg. No. 20,827, Kenneth E. Payne, Reg. No. 23,098, Herbert H. Mintz, Reg. No. 26,691, Larry O'Rourke, Reg. No. 26,014, Albert J. Santorelli, Reg. No. 22,610, Michael C. Elmer, Reg. No. 25,857, Richard H. Smith, Reg. No. 20,609, Stephen C. Peterson, Reg. No. 26,325, John M. Romary, Reg. No. 26,331, Bruce C. Zotter, Reg. No. 27,680, Dennis P. O'Reilly, Reg. No. 27,932, Allen M. Sokal, Reg. No. 26,695, Robert D. Bajefsky, Reg. No. 25,387, Richard L. Stroup, Reg. No. 28,478, David W. Hill, Reg. No. 28,220, Thomas L. Irving, Reg. No. 28,619, Charles E. Lipsey, Reg. No. 28,165, Thomas W. Winland, Reg. No. 27,605, Basil J. Lewis, Reg. No. 28,818, Martin I. Fuchs, Reg. No. 28,508, E. Robert Yoches, Reg. No. 30,120, Barry W. Graham, Reg. No. 29,924, Susan Haberman Griffen, Reg. No. 30,907, Richard B. Racine, Reg. No. 30,415, Thomas H. Jenkins, Reg. No. 30,857, Robert E. Converse, Jr., Reg. No. 27,432, Clair X. Mullen, Jr., Reg. No. 20,348, Christopher P. Foley, Reg. No. 31,354, John C. Paul, Reg. No. 30,413, Roger D. Taylor, Reg. No. 28,992, David M. Kelly, Reg. No. 30,953, Kenneth J. Meyers, Reg. No. 25,146, Carol P. Einaudi, Reg. No. 32,220, Walter Y. Boyd, Jr., Reg. No. 31,738, Steven M. Anzalone, Reg. No. 32,095, Jean B. Fordis, Reg. No. 32,984, Barbara C. McCurdy, Reg. No. 32,120, James K. Hammond, Reg. No. 31,964, Richard V. Burgujian, Reg. No. 31,744, J. Michael Jakes, Reg. No. 32,824, Dirk D. Thomas, Reg. No. 32,600, Thomas W. Banks, Reg. No. 32,719, Christopher P. Isaac, Reg. No. 32,616, Bryan C. Diner, Reg. No. 32,409, M. Paul Barker, Reg. No. 32,013, Andrew Chanho Sonu, Reg. No. 33,457, David S. Forman, Reg. No. 33,694, Vincent P. Kovalick, Reg. No. 32,867, James W. Edmondson, Reg. No. 33,871, Michael R. McGurk, Reg. No. 32,045, Joann M. Neth, Reg. No. 36,363, Gerson S. Panitch, Reg. No. 33,751, Chen M. Taylor, Reg. No. 33,216, Charles E. Van Horn, Reg. No. 40,266, and Linda A. Wadler, Reg. No. 33,218, and \_\_\_\_\_ Please address all correspondence to FINNEGAN, HENDERSON, FARABOW, GARRETT & DUNNER, L.L.P., 1300 I Street NW, Washington, D.C. 20005, Telephone No. (202) 408-4000.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true, and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application or any patent issuing thereon

|   |   |                        |
|---|---|------------------------|
| Full Name of First Inventor<br><b>JOSEPH C. BENINI</b>          | Inventor's Signature<br><i>Joseph C. Benini</i> | Date<br><b>4-21-98</b> |
| Residence<br>Kersey Pennsylvania 15846                          | Citizenship<br>USA                              |                        |
| Post Office Address<br>100 Avenue A, Kersey, Pennsylvania 15846 |   |                        |

Listing of Inventors Continued on Page 2 hereof ☒ Yes ☐ No
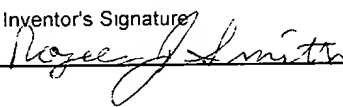
|   |   |                    |
|---|---|--------------------|
| Full Name of Second Inventor<br>TIMOTHY G SMITH                         | Inventor's Signature<br>  | Date<br>4-21-98    |
| Residence<br>St. Mary's, Pennsylvania 15857                             |   | Citizenship<br>USA |
| Post Office Address<br>204 Vine Road, St. Mary's, Pennsylvania 15857    |   |                    |
| Full Name of Third Inventor<br>ROGER J SMITH                            | Inventor's Signature<br> | Date<br>4-21-98    |
| Residence<br>St. Mary's, Pennsylvania 15857                             |   | Citizenship<br>USA |
| Post Office Address<br>132 West Conclot, St. Mary's, Pennsylvania 15857 |   |                    |
| Full Name of Fourth Inventor  | Inventor's Signature  | Date               |
| Residence   |   | Citizenship        |
| Post Office Address   |   |                    |
| Full Name of Fifth Inventor   | Inventor's Signature  | Date               |
| Residence   |   | Citizenship        |
| Post Office Address   |   |                    |
| Full Name of Sixth Inventor   | Inventor's Signature  | Date               |
| Residence   |   | Citizenship        |
| Post Office Address   |   |                    |
| Full Name of Seventh Inventor   | Inventor's Signature  | Date               |
| Residence   |   | Citizenship        |
| Post Office Address   |   |                    |
| Full Name of Eighth Inventor  | Inventor's Signature  | Date               |
| Residence   |   | Citizenship        |
| Post Office Address   |   |                    |
| Full Name of Ninth Inventor   | Inventor's Signature  | Date               |
| Residence   |   | Citizenship        |
| Post Office Address   |   |                    |
| Full Name of Tenth Inventor   | Inventor's Signature  | Date               |
| Residence   |   | Citizenship        |
| Post Office Address   |   |                    |